


ΩDBK HRKD Application Notes

HRKD Construction

The delta fins are designed to allow large air flow and significantly minimise pressure drop while CAB Brazing improves heat transfer. Two spring plates at the top and bottom, tensions and positions the element.

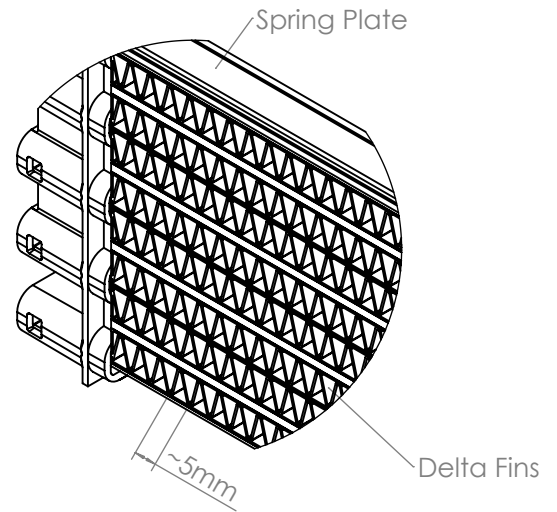


Mounting Recommendation:

HRKD Element is a rigid assembly with upto 4 rows of PTC stones. Two or more HRKDs can also be arranged adjacent to each other to obtain more power. Designed for use up to 600VAC.



Attn: All metal parts are live!

Attn: Electrical Spacing
(must comply with end use product standard)

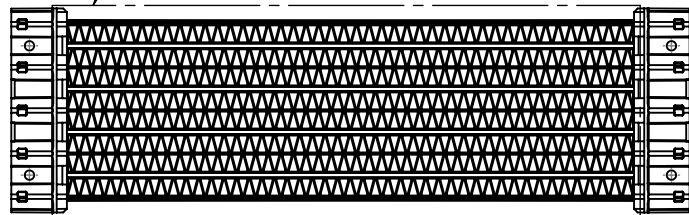

Optional Housing Features

4×M4 fasteners

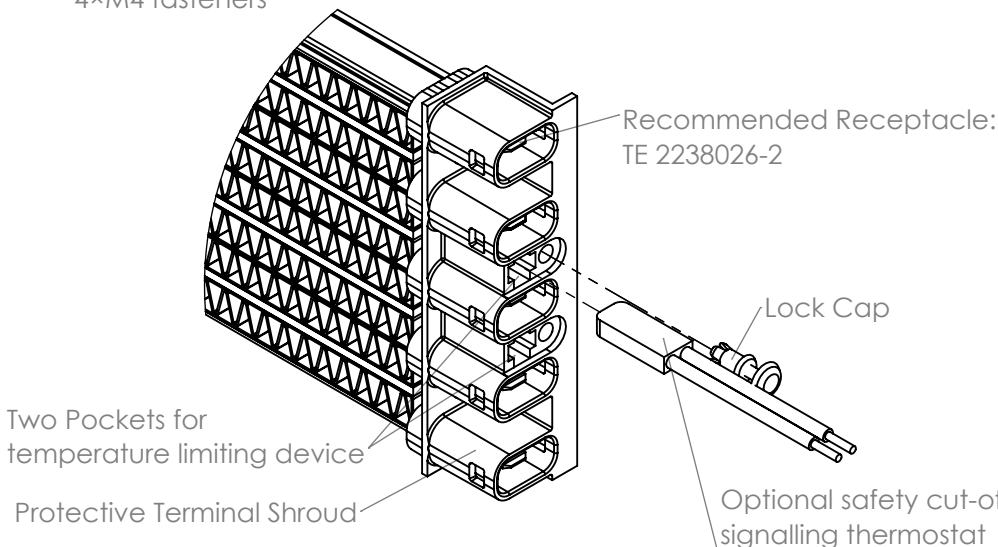

Connection