

### TYPHOON 60



#### Features

- Compact
- High Power Vs Size
- Aluminium Outer Housing


#### Options (contact us)

- Alternative Power
- Alternative Voltage
- Bracket Mounting

DBK's knowledge of thermal management gives us the experience to guide and support you with your technical challenges - we can manage the complete project from concept to full production release.

Typhoon 60	200	300	400	500
Article Number	1032023.11	1032123.11	1032223.11	1032323.11
Nominal Power Output (10°C) [W]	200	300	400	500
Voltage [V]	220-240 AC			
Inrush current (230V) [A]	4	6.3	6.3	8
Connector	Screwless AWG 20 -14 (0.5 - 2.5mm <sup>2</sup> )			
Dimensions (LxWxH) [mm]	90x63x93			
Mounting	Clip for DIN rail EN 60715			
Airflow Rate (fan nominal)	30 m <sup>3</sup> /hr (18 CFM)			
Fan Life Time – L10 (40°C) [hrs]	70,000			
Ingress Protection	IP20			
Operating Temperature Range [°C]	-40 to 70°C			
Protection Class	II			
Maximum Temperature	65°C except upper grille			
Weight [g]	340			

#### Design Drawing

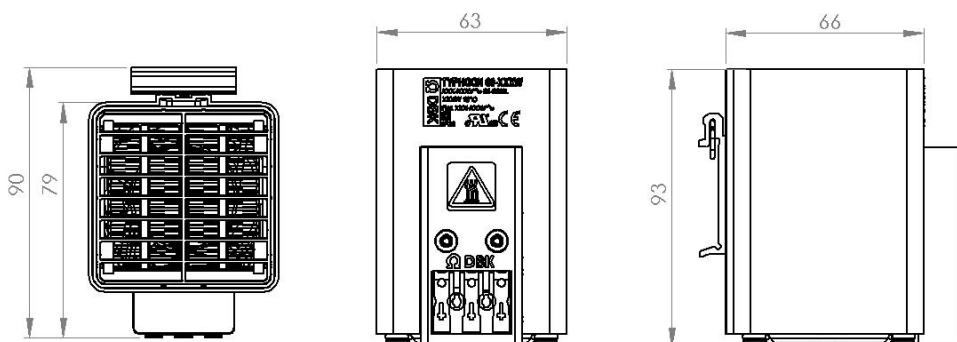

#### Connection

Heater, Live	Pos1
Neutral	Pos2
Fan, Live	Pos3